


SNC-CLW-150WB1 – 150 WATT 16,500 LUMENS



Dual Internal  
Cooling Fans &  
Heat Sink

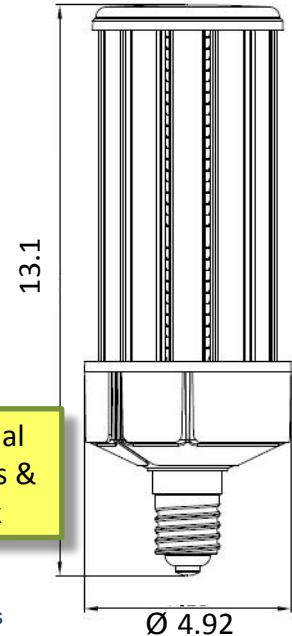

### LED Corn Lights

Replacements for Metal Halide, HPS, Mercury Vapor, Super Spiral (CFL), and Halogen Bulbs

LED Corn Lights, also referred to as Corncob Lights or Corn Bulbs, are a versatile, energy-saving, retrofit replacement for a wide variety of metal halide (MH), high-pressure sodium (HPS), mercury vapor, compact fluorescent (CFL), and halogen bulbs. These Corn Lights are powered by an input voltage of 100-277V AC, and utilize a standard screw-in E-39 base, making them suitable for use in ceiling lamps and fixtures, enclosed indoor and outdoor luminaires, and high-bay or low-bay HID lighting fixtures.


- DLC, UL, & CUL Certified
- E39 Base
- Pure White (5,000k)
- 360 Degree Beam Spread
- IP64 Waterproof Rating
- Big Heat Sink & Dual SUNON Fans
- Internal Driver
- Input Voltage AC100-277V
- No UV or IR in the Beam
- Energy saving, long service life
- Uniform Intensity
- Safe to the Eyes
- NO flickering, NO humming
- Eco-Friendly – No Mercury




PRODUCT SPECIFICATIONS	
Product name	LED Corn Light
Part No	SNC-CLW-150WB1
Light Type	Corn Light
Dimension	Ø 4.92 x 13.1
Technical Characteristic	
Color temperature	2700-7000K
CRI	> 70
Lumen	16500-18000 LM
Lumen Efficacy	115-120 LM/W
Input Power	150 W
Viewing Angle	360 degree
Input Voltage	AC100-277V 50/60Hz
PFC	>90%
Equivalent	1000W incandescent / 400W CFL
Waterproof Rating	IP64
MATERIALS	
LED Brand	EPISTAR
LED Type	SMD2835
LED QTY	1064 PCS
Housing	PC+AL
Housing color	White
Cover	Clear PC
OTHERS	
Operating Temperature	-4° to 113°
Operating Humidity	20%-70% RH
Storage Temperature	-22° to 176°
Storage Humidity	10%-75% RH
Application	Indoor
Safety Certification	DLC,UL, CUL
Warranty Time	5 Years

DATA OF LAMP		PHOTOMETRIC DATA Eff: 123.40 lm/W			
MODEL		I <sub>max</sub> (cd)	2152	S/MH (C0/180)	3.47
NOMINAL POWER (W)	150	LOR (%)	100.0	S/MH (C90/270)	3.70
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	17855	η UP, DN (C0-180)	21.5, 25.2
NOMINAL FLUX (lm)	17855	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	23.8, 29.5
LAMPS INSIDE	1	η up (%)	45.4	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	230	η down (%)	54.6	CIBSE SHR MAX	0.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

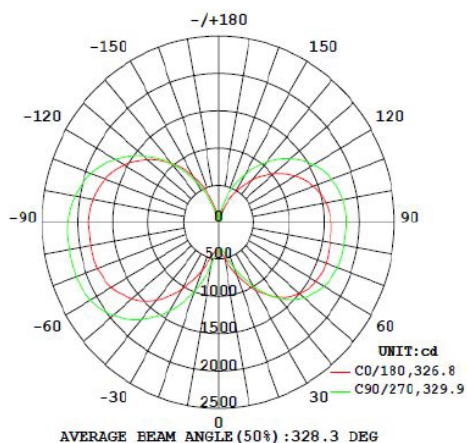


Flux out: 1996 lm

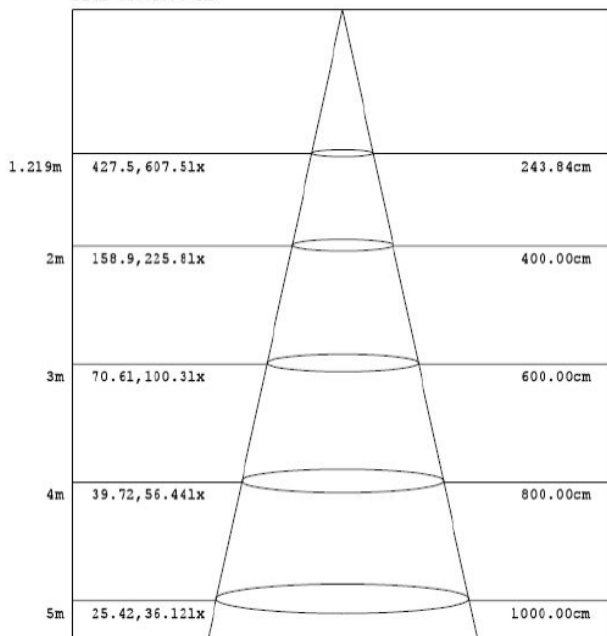

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


### Package

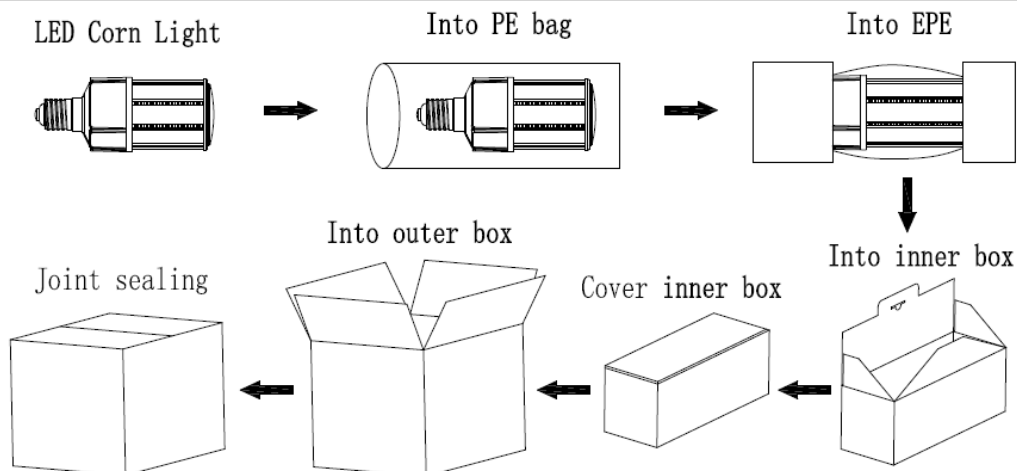

	Size	Qty/ Carton	Net Weight/ Carton	Gross Weight/ Carton
Inner box	14.3" x 5.9" x 5.9"	1	3.08 lbs	3.5 lbs
Outer box	24.8" x 18.5" x 12.5"	12	37.0 lbs	45.41 lbs

### Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- Make sure to remove or bypass the ballast in the fixtures before install the lamps.
- Suitable for damp locations. Do not use with dimmers.
- Suitable for use in enclosed luminaires, min. lamp compartment dimensions: 420\*230\*230MM.
- No-professionals, must not install and disassemble the lamps.

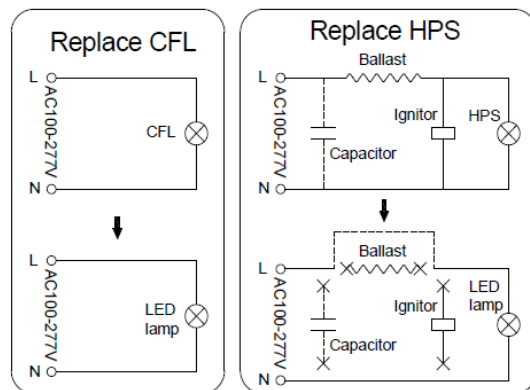

### Trouble Shootings

Troubles	Check points
Flickering of the lamps	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection